



6SC7

6SC7

HIGH-MU TWIN TRIODE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.3 amp

Direct Interelectrode Capacitances (Approx.):*

Grid to plate 2 μf Grid to cathode, heater, and shell 2 μf Plate to cathode, heater, and shell 3 μf

Mechanical:

Mounting Position Any

Maximum Overall Length 2-5/8"

Maximum Seated Length 2-1/16"


Maximum Diameter 1-5/16"

Bulb Metal Shell, MT-8

Base Small-Wafer Octal 8-Pin (JETEC No. B8-21)

Basing Designation for BOTTOM VIEW 8S

Pin 1-Shell

Pin 2-Plate of
Unit No.2Pin 3-Grid of
Unit No.2Pin 4-Grid of
Unit No.1Pin 5-Plate of
Unit No.1

Pin 6-Cathode

Pin 7-Heater

Pin 8-Heater

AMPLIFIER - Class A₁

Values are for Each Unit

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE 250 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . . 90 max. volts

Heater positive with respect to cathode . . 90 max. volts

Characteristics:

Plate Voltage 250 volts

Grid Voltage -2 volts

Amplification Factor 70

Plate Resistance (Approx.) 53000 ohms

Transconductance (Approx.) 1325 μmhos

Plate Current 2 ma

Typical Operation as Resistance-Coupled Amplifier:

See RESISTANCE-COUPLED AMPLIFIER CHART No. 17
at front of this Section

* values for each unit with pin 1 connected to pin 6.

←Indicates a change.

NOV. 5, 1954

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA

6SC7



6SC7

AVERAGE PLATE CHARACTERISTICS EACH TRIODE UNIT

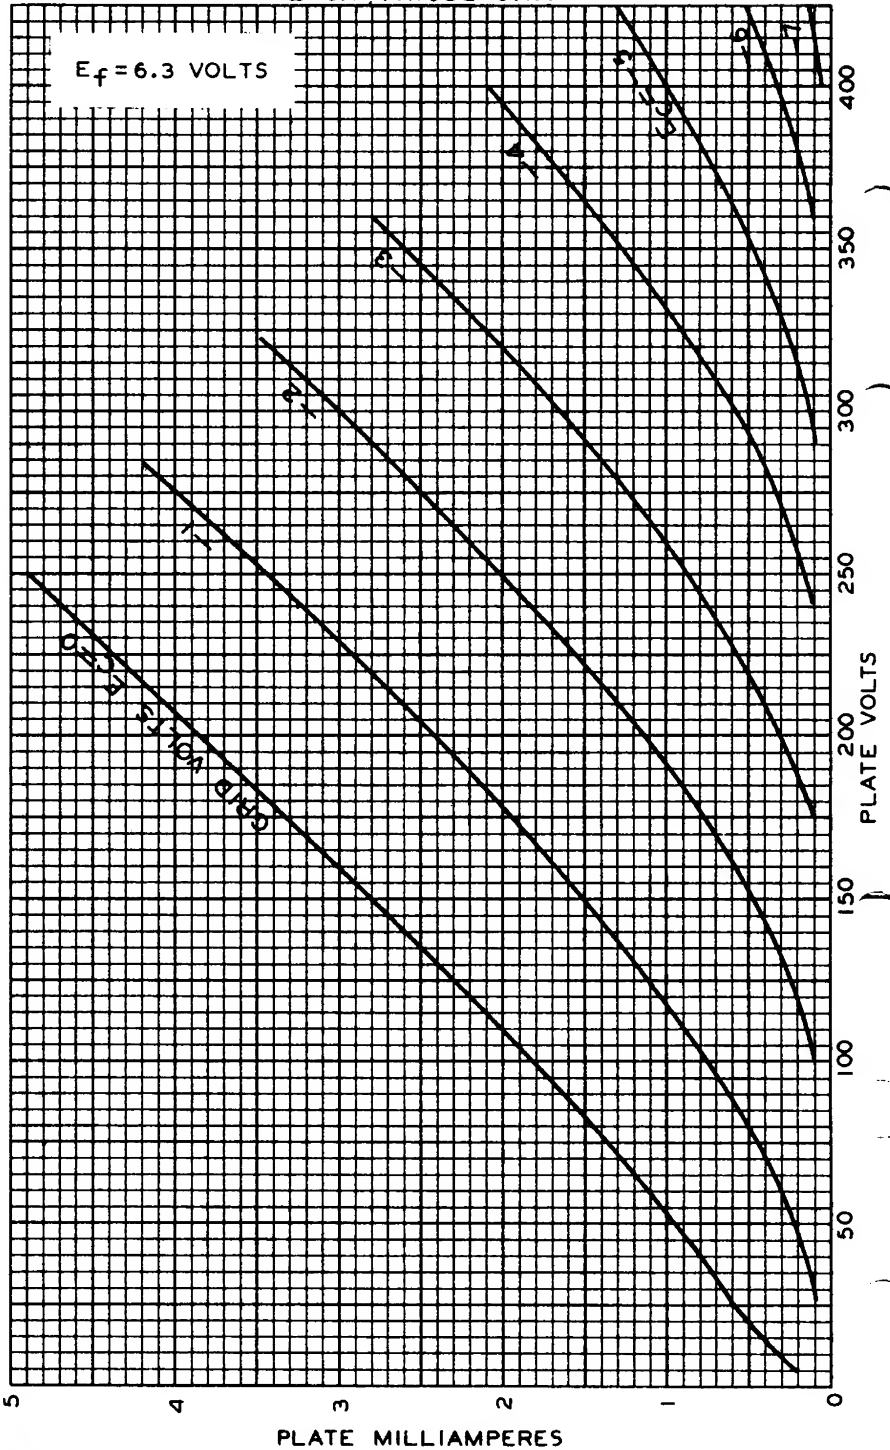

OCT. 16, 1940

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6096RI